



NO. 212400155804385Y00041



运输危险性鉴定书

Hazard Classification and Identification Report for Transport of Goods

锂电池 - 符合包装说明966第11部分

4G 无线路由器 B313-322 (内含锂离子聚合物电池 HB624666RDW 3.8V 2400mAh 样品名称:

9.12Wh)

4G CPF 3i B313-322 (Packed with Rechargeable Li-ion Polymer Battery Sample name:

HB624666RDW 3.8V 2400mAh 9.12Wh)

成都市垒趣信息技术有限公司

委托单位: Chengdu Leiqu Information Technology Co., Ltd.

成都市垒趣信息技术有限公司 生产单位:

Chengdu Leiqu Information Technology Co., Ltd.









Page 1/4

Hazard Classification and Identification Report

for Transport of Goods

运输危险性鉴定书

		1. 1.	4G 无线路由器 B313-32	2 (内含锂离子聚合物电	池 HB624666RDW 3.8V 240	OmAh 9.12Wh)	
持口分孙		中文 Chinese					
样品名称 Chinese Sample Name							
Campi	c rvarri	英文	4G CPF 3i B313-322 (Packed with Rechargeable Li-ion Polymer Battery HB624666RDW 3.8V 2400mAh 9.12Wh)				
		English					
		当に	成都市垒趣信息技术有限公司				
委托单位 Applicant			Chengdu Leiqu Information Technology Co., Ltd.				
生产单位			成都市垒趣信息技术有限公司				
Manufacturer			Chengdu Leiqu Information Technology Co., Ltd.				
检验方法、程序			国际航空运输协会《危险品规则》65版				
Inspection method and procedure			IATA Dangerous Goods Regulations (DGR) 65th Edition				
样品外观			白色塑胶外壳 White Plastics cement shell				
Sample appearance		- 1. Vis 1/-	锂电池总净重≤5kg。				
Pa	包装件信息 Package information		性电池总存重≪5kg。 Lithium batteries total net weight≪5kg.				
序号	onage i	电池种类	型号	容量Capacity	放置方式	单颗重量kg	数量
NO.		Battery type	Model	/锂含量Li content	Placement	Unit weight	Quantity
1		锂聚合物单电芯电 Rechargeable	HB624666RDW	2400mAh 9.12Wh	与设备包装在一起 Packed with equipment	0.0409	10
	Li-pol	ymer single cell					
	1	battery 合除性识别(H	azards identificat:	ion)	4/		
		里离子电池。	azaras racitiritat.	iony			
-	- 1	ithium ion batte	ery.				
	_						
	DENTI FI						
鉴	Ξ ,) 空运按照国际	航空运输协会 《告险》	只知则》	(Suggestion according	ag to TATA	DCD)
			明966基本要求和第11部分		(Suggestion according	ig to IAIA	DGR)
定					and section II of Packa	ging Instruc	tion 966.
	02						
结	CO						
	NCL 3	3. 包装要求 (Pac	kaging requirements	$_{\rm S})$			
论	CONCL USI ON	按包装说明966第11部分要求办理。					
	0	The article is packaged according to the Packaging Instruction 966 section II.					
	2	了。 一种的人,					
2							
	检验日期: 2024-11-04						W/X
		Inspection Date: Issue Date: Effective Date 事个包装件内电池数量不超过设备操作所需电池数加二套。The number of cells or backers in each package is not					
			oriate number for the			- The	2
						· ·	

批准 Z Z Approver: 七星

Checker:

主检 Appraiser: 品情



Hazard Classification and Identification Report for Transport of Goods

NO. 212400155804385Y00041


Page 2/4


序号	检验结果及其他事项						
No.	Inspection results and other things						
1	本鉴定书所述锂电池按照《危险品规则》(65版) 3.9.2.6.1(e)规定的质量管理体系进行制造。 本鉴定书所述锂电池不属于因安全原因召回的锂电池。 Lithium cells and batteries listed in this report were manufactured under the quality management program described in IATA DGR 65th 3.9.2.6.1(e). Lithium cells and batteries listed in this report are not the defective cells or batteries returned to the manufacturer for safety reasons.						
2	本鉴定书所述锂电池已通过联合国《试验和标准手册》第111部分38.3小节相应测试要求。 包装件能够承受1.2m跌落试验。 Lithium cells and batteries listed in this report are of the types proved to meet the requirements of each applicable test in the UN Manual of Tests and Criteria, Part III, sub-section 38.3. The package has passed the 1.2m drop test. UN38.3试验概要编号 The UN38.3 Test Summary No.(s) 812400400121656 详细信息请扫描右侧二维码。 Please scan the QR code on the right for more information.						
3	锂电池完全封装在内包装内,并与设备一起放在坚固的刚性外包装中。 Lithium cells and batteries are packed in completely enclosed inner packagings and then placed with the equipment in a strong rigid outer packaging.						
4	电池具有适当的防短路措施。 设备固定在外包装内以免移动,并配备防止发生意外启动的有效手段。 Cells and batteries are properly protected to prevent short circuits. The equipment is secured against movement within the outer packaging and is equipped with an effective means of preventing accidental activation.						
5	一当使用航空货运单时,如果托运货物中有贴锂电池标记的包装件,那么必须在"货物性质和数量"栏注明"锂离子电池符合包装说明966第11部分"。 一如果在一份航空货运单内包含来自多个包装说明第II部分的锂电池包装件时,对于不同的锂电池类型和/或包装说明可以合并为一份声明,前提是声明中注明适用的锂电池类型和包装说明编号。 —Where a consignment includes packages bearing the lithium battery mark, the words "lithium ion batteries in compliance with Section II of PI 966" must be included on the air waybill, when an air waybill is used. The information should be shown in the "Nature and Quantity of Goods" box of the air waybill. —Where packages of Section II lithium batteries from multiple packing instructions are included on one air waybill, the compliance statement for the different lithium battery types and/or packing instructions may be combined into a single statement provided that the statement identifies the applicable lithium battery type(s) and packing instruction numbers.						
6	每个包装件必须按DGR图7.1.C所示做耐久清晰的标记。包装件必须具有足够的尺寸在其一个面上粘贴未被折叠的标记。注:63版DGR图7.1.C 所示锂电池标记可继续使用至2026年12月31日。 Each package must be durably and legibly marked with the mark shown in Figure 7.1.C in IATA DGR. The package must be of such a size that there is adequate space to affix the mark on one side of the package without the mark being folded. Note: The mark illustrated in Figure 7.1.C of the 63rd edition of DGR may continue to be used until 31 December 2026.						
7							
	-验证码:968171-						


测在

Hazard Classification and Identification Report for Transport of Goods

Page 3/4

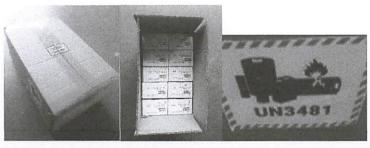

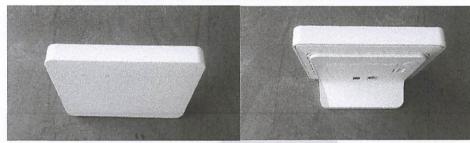

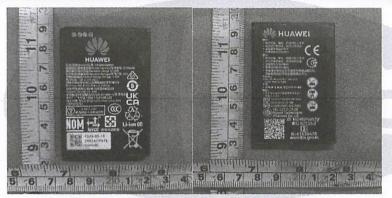



Hazard Classification and Identification Report for Transport of Goods

附件

运输信息

Transport Information

Page 4 / 4

本机构声明

以下内容为托运人或托运人代理人在使用本鉴定书时候填写的运输信息,不属于鉴定内容。托运人或托运人代理人应保证运输信息与鉴定书的关联性、实际运输货物与鉴定书的一致性以及鉴定书委托单位已知情并授权鉴定书的使用权,如发生任何不一致,由托运人或托运人代理人承担全部责任。

如有需要请托运人或托运人代理人填写以下内容并盖章 运单号 AWB NO. 件数 Number of pieces 目的港 Destination

托运人或托运人代理人声明

本人(本单位)声明:上述运输信息填写真实、准确,鉴定书已获得委托单位的授权使用,实际运输的货物情况与本鉴定书一致。如因信息填写错误、实际运输的货物情况与本鉴定书不一致造成的一切后果,由本人(本单位)承担全部责任,并赔偿对承运人造成的全部损失。

托运人或托运人代理人(签字):

单位盖章:







Hazard Classification and Identification Report for Transport of Goods

锂电池类物品

4G 无线路由器 B313-322 (内含锂离子聚合物电池 HB624666RDW 3.8V 2400mAh 样品名称:

9.12Wh)

4G CPF 3i B313-322 (Packed with Rechargeable Li-ion Polymer Battery Sample name:

HB624666RDW 3.8V 2400mAh 9.12Wh)

成都市垒趣信息技术有限公司

委托单位: Chengdu Leiqu Information Technology Co., Ltd.

成都市垒趣信息技术有限公司 生产单位:

Chengdu Leigu Information Technology Co., Ltd.





SHANGHAI INSTITUTE OF CHEMICAL INDUSTRY TESTING CO.,LTD.





Hazard Classification and Identification Report for Transport of Goods

NO. 212400455604586 Page 1/3

4G 无线路由器 B313-322 (内含锂离子聚合物电池 HB624666RDW 3.8V 2400mAh 9.12Wh) 中文 样品名称 Chinese Sample Name 46 CPF 3i B313-322 (Packed with Rechargeable Li-ion Polymer Battery HB624666RDW 3.8V 2400mAh 英文 9.12Wh) English 成都市垒趣信息技术有限公司 委托单位 Chengdu Leiqu Information Technology Co., Ltd. Applicant 成都市垒趣信息技术有限公司 生产单位 Chengdu Leigu Information Technology Co., Ltd. Manufacturer 国际海事组织《国际海运危险货物规则》(2022版) 检验方法、程序 IMO International Maritime Dangerous Goods Code (2022 Edition) Inspection method and procedure 白色塑胶外壳 样品外观 White Plastics cement shell Sample appearance 包装件信息 Package information 型号 放置方式 电池种类 容量Capacity 序号 Model /锂含量Li content Placement Battery type NO. 可充电锂聚合物单电芯电 HB624666RDW 2400mAh 9, 12Wh 与设备包装在一起 1 Packed with equipment 池 Rechargeable Li-polymer single cell battery 1. 危险性识别 (Hazards identification) 锂离子电池。 Lithium ion battery. DENTI FI CATI ON CONCL USI 2. 海运按照国际海事组织《国际海运危险货物规则》办理的类项(Suggestion according to IMO IMDG 鉴 Code) 根据特殊规定188, 该物品不受IMO IMDG Code其他条款限制。 定 The article is not subject to other provisions of IMO IMDG Code according to special provision 188. 结 3. 包装要求(Packaging requirements) 论 无。 None. 签发日期: 检验日期: Inspection Date: 2024-11-04 生效日期 2024-11-04 Effective Date Issue Date: 备注 Comment

批准 一足 B

审核 表 定社

主检 Appraiser:

耐情



Hazard Classification and Identification Report for Transport of Goods

Page 2/3

序号 No.	检验结果及其他事项 Inspection results and other things						
1	本鉴定书所述锂电池按照《国际海运危险货物规则》(2022版) 2.9.4.5规定的质量管理体系进行制造。 Lithium cells and batteries listed in this report were manufactured under the quality management program described in IMDG CODE 2022 EDITION 2.9.4.5.						
2	本鉴定书所述锂电池已通过联合国《试验和标准手册》第III部分38.3小节相应测试要求。 包装件能够承受1.2m跌落试验。 Lithium cells and batteries listed in this report are of the types proved to meet the requirements of each applicable test in the UN Manual of Tests and Criteria, Part III, sub-section 38.3. The package has passed the 1.2m drop test. UN38.3试验概要编号 The UN38.3 Test Summary No.(s) 812400400121656 详细信息请扫描右侧二维码。 Please scan the QR code on the right for more information.						
3	锂电池完全封装在内包装内,位于坚固的外包装中。 Lithium cells and batteries are packed in inner packagings that completely enclose the cell or battery and placed in a strong outer packaging.						
4	电池具有适当的防短路措施。 Cells and batteries are properly protected to prevent short circuits.						
5	每个包装件必须标示恰当的锂电池标记。 Each package shall be marked with the appropriate lithium battery mark.						
6							
7							
	-验证码: 563354-						

Hazard Classification and Identification Report for Transport of Goods

NO. 212400455604586 Page 3/3



报告结束